

Convertible

AC092MCERA



FEATURES & BENEFITS

- Flexible installation, both on the floor or ceiling are ok.
- Only 199mm thickness, suitable for limited spaces
- Large angle air supplying
- Automatic horizontal and vertical swing
- Reserved fresh air inlet


PERFORMANCE

Indoor unit name:	Convertible	Rated heating capacity(kW):	3.2
Indoor unit model:	AC092MCERA	Heating input power(kW):	0.1
Type:	Convertible	Rated cooling conditions:	Indoor(°C DB/WB):27/19 Ambient(°C DB/WB):35/24
Rated cooling capacity(kW):	2.8	Rated heating conditions:	Indoor(°C DB/WB):20/14.5 Ambient(°C DB/WB):7/6
Sensible capacity(kW):	2.1	Rated piping length (m):	
Cooling input power(kW):	0.1	Rated height separation(m):	

INDOOR UNIT DETAILS

Power supply(V/Hz/Ph):	220-230/50/60/1	Airflow rate (H/M/L)(m ³ /h):	800/710/580
Power supply connections:	L,N, Ground	Moisture removal(m ³ /h):	
Min. circuit Amps MCA (A):	0.64	Gas pipe connection(mm):	Φ9.52
Max. fuse Amps MFA (A):	2.04	Liquid pipe connection(mm):	Φ6.35
Dimensions(H×W×D)(mm):	655×990×199	Condensate connection(mm):	Φ20
Panel(H×W×D)(mm):	/	Sound pressure(H/M/L)(dBA):	38/35/33
Net weight(kg):	28.3	Sound power level(H/M/L)(dBA):	51/48/46
Panel weight(kg):	/	Ext. static pressure (Rated/Max)(Pa):	0/0

DIMENSIONAL DRAWING

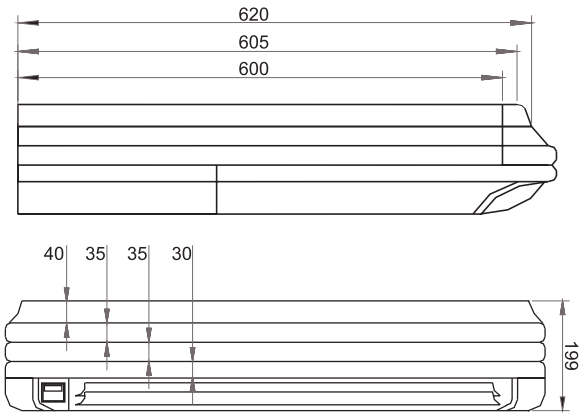

right side

